


Dimensions		
Width	Depth	Height
483	12	44
Weight	Approx. 0.8 Kg	

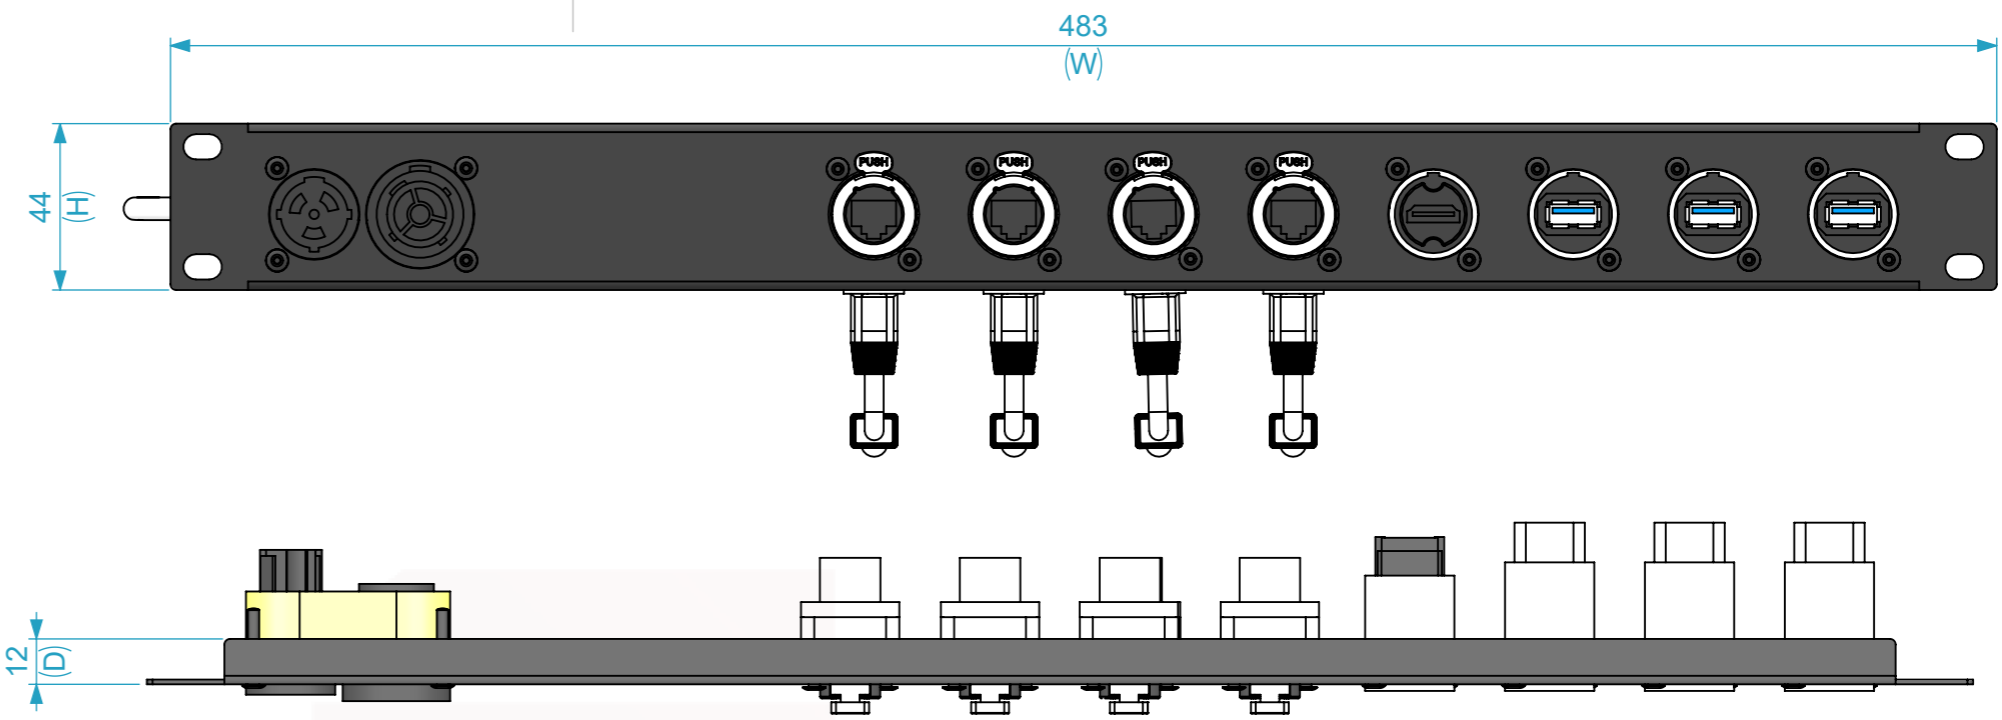

Appliance inlet-outlet combination, 1/4" flat tab terminals, powerCON TRUE1 TOP with breaking capacity (CBC)

Socket installation according to the different regions. (EU, UK, US)

(*) 4x RJ45 U/UTP Cat.5e Cable

(*) Cabo HDMI®2.0 4K x 2K (2160p/1080p) Male-Male

(*) USB2.0 type A + USB type B cable

EtherCON Series RJ45 connector system, optimized for pro audio, video and lightning network applications.

HDMI feedthrough adapter, D-shape housing HDMI solution for the transmission of any digital TV and PC video format including high-definition video (HDTV).

Reversible USB 3.0 gender changer (type A and B), Nickel D-housing (Not compatible with NKUSB-* cables).

(*) Not included

General External Dimensions	
W	Width
D	Depth
H	Height

Name	alvaro.santos	
Date	03/08/2023	
Reference	CST.IF09	
Scale	1:2	units in mm DO NOT SCALE
general tolerance	0.8mm	
Connection System, Waves		



This drawing must not be copied or disclosed without consent of the owner



A3