




Internal Dimensions		
Width	Depth	Height
600	800	6 U
Weight	Approx. 22 Kg	
Wall Thickness		10mm

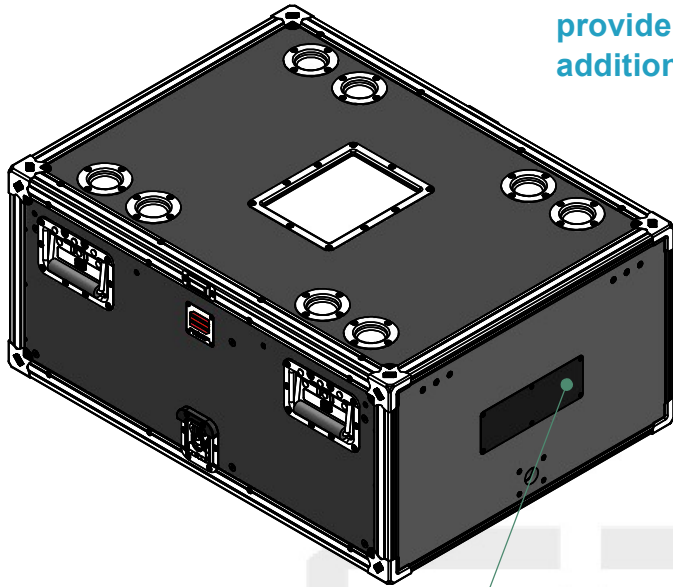



Optional printing plate

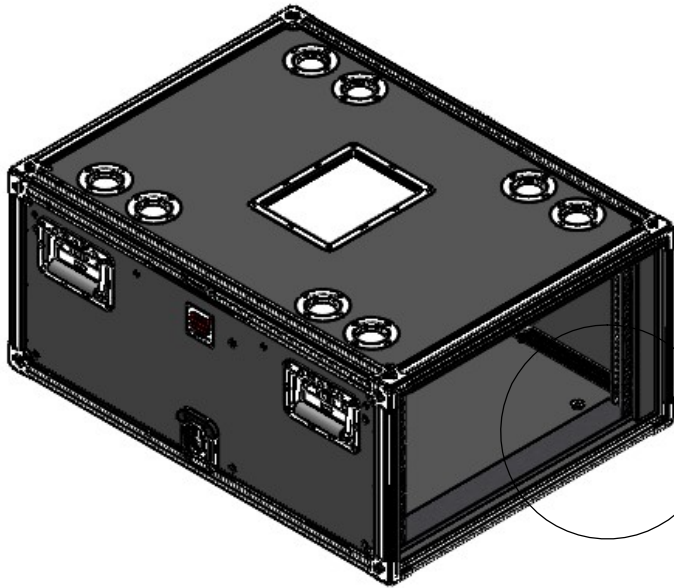

Side rail profiles provide support for additional rack rails

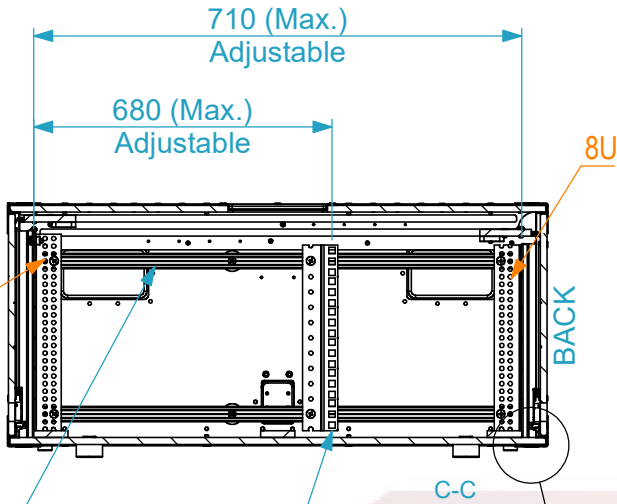


Side rack rails


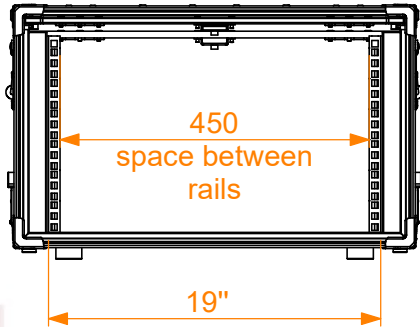
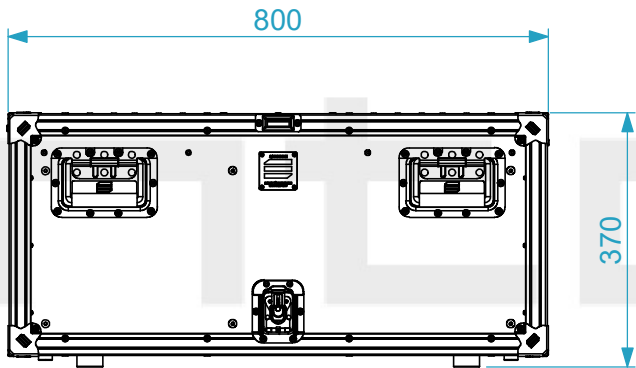


Min. distance between rack rails and door

Min. distance between rack rails and door latch

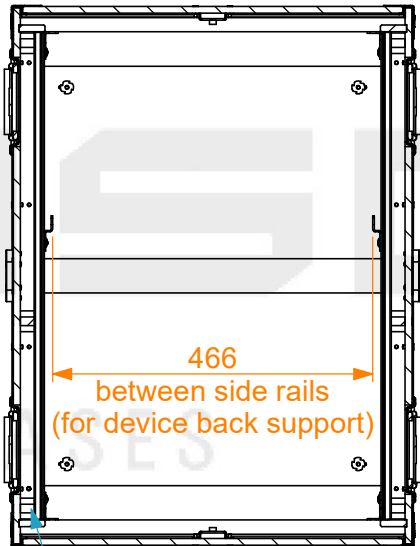

Anti-vibration mounts between the side rail profiles and the rack walls

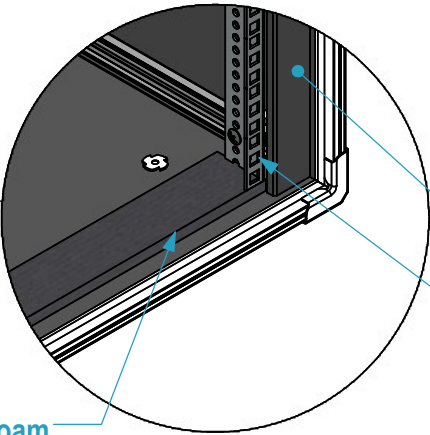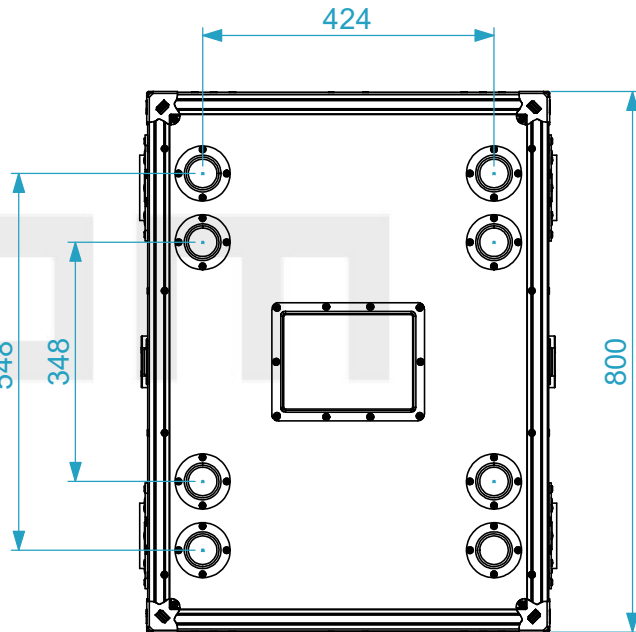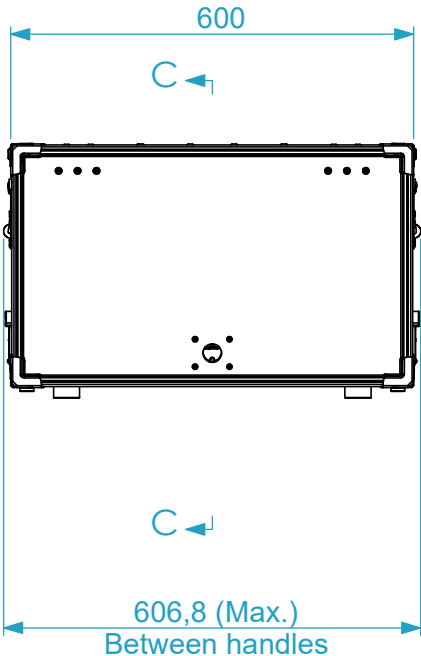

Cover panels


2 mm thick steel rack rails for standard M6 cage nuts

HD Foam


	Name	Date
Drawn by	paula.almeida	25/06/2026
Reference	RCS.0880	
Scale	1:1	units in mm DO NOT SCALE
1st Angle projection	19" Compact Sliding, 8U 710-ARR	
		general tolerance 0.8mm

A3 This drawing must not be copied or disclosed without consent of the owner





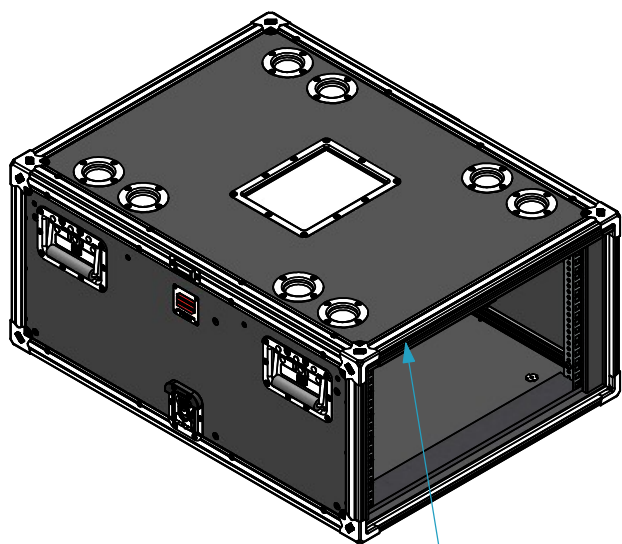




Top sliding door

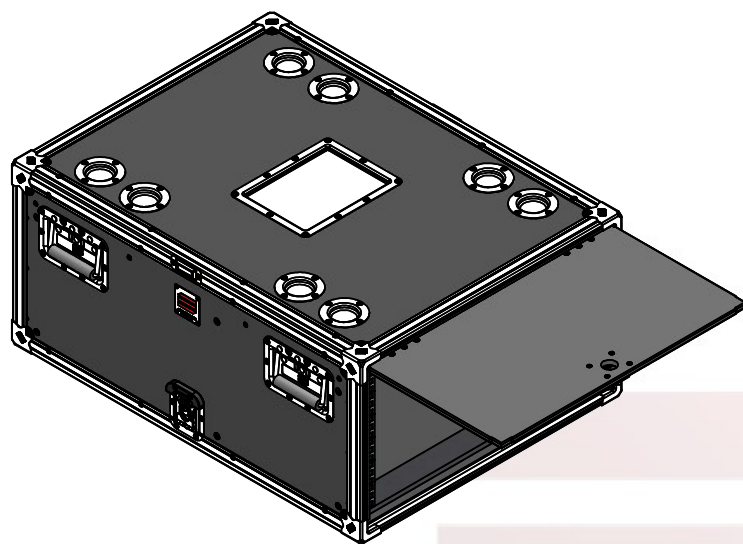

STACKING WITH A RCS RACK

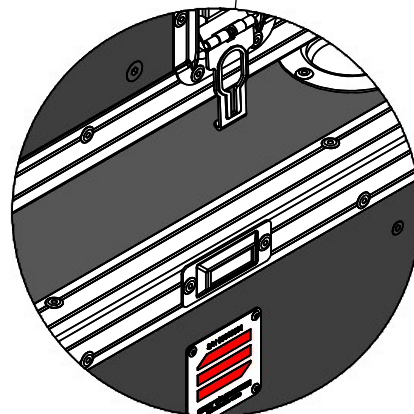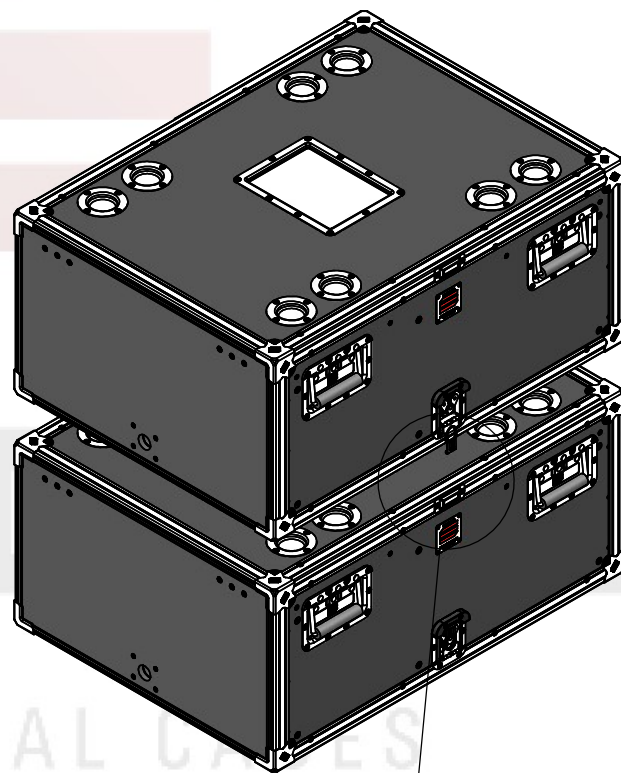

STACKING RCS RACKS WITH DIFFERENT DEPTHS

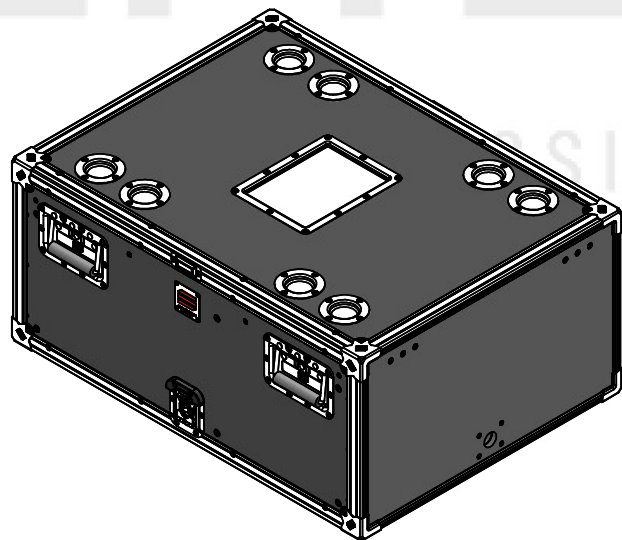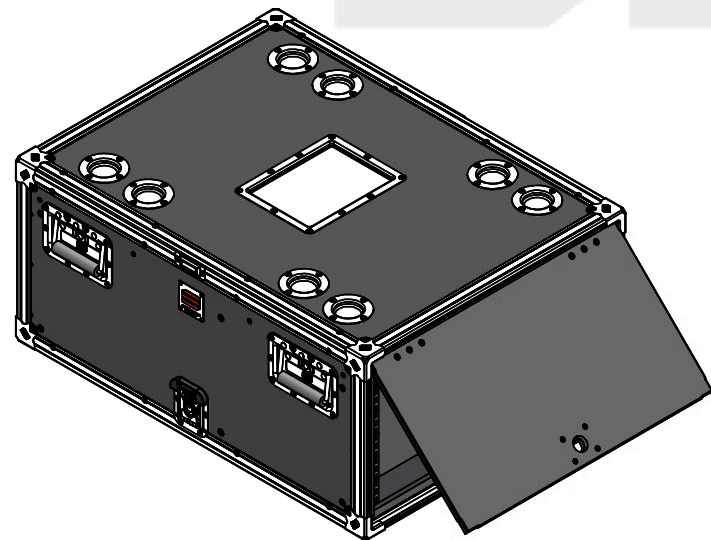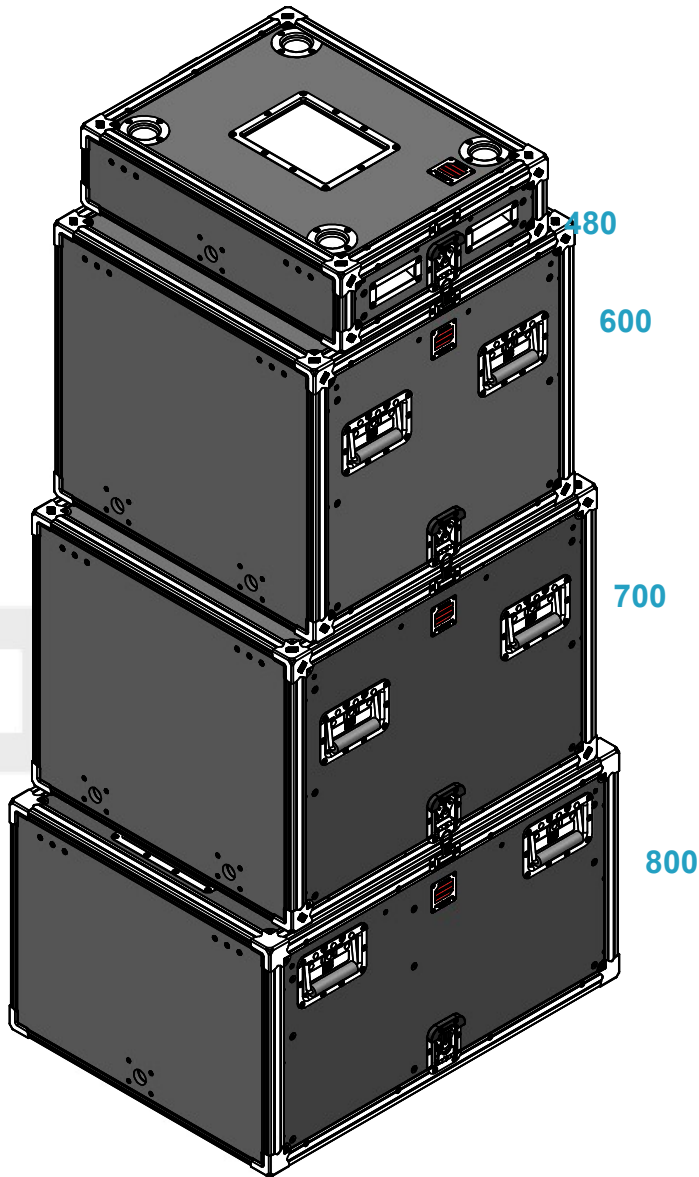

	Name	Date
Drawn by	paula.almeida	25/06/2026
Reference	RCS.0880	
Scale 1:12	units in mm	general tolerance 0.8mm
	DO NOT SCALE	
1st Angle projection	19" Compact Sliding, 8U 710-ARR	



This drawing must not be copied or disclosed without consent of the owner

A3