




Internal Dimensions		
Width	Depth	Height
19"	800	20U
Weight	Approx. 69 Kg	
Wall Thickness		10mm

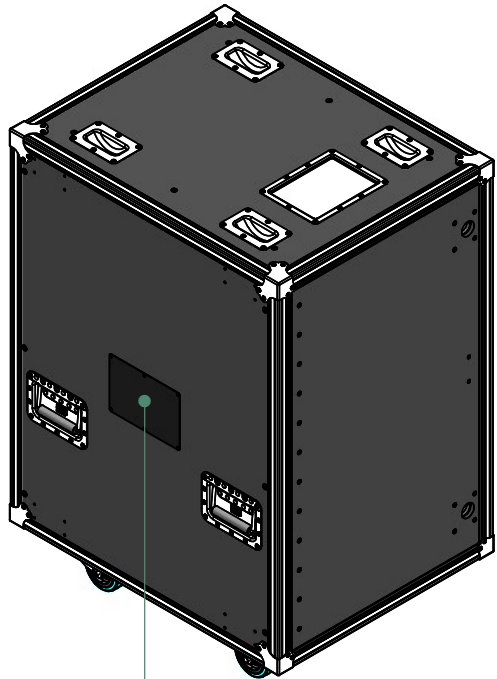

Optional printing plate

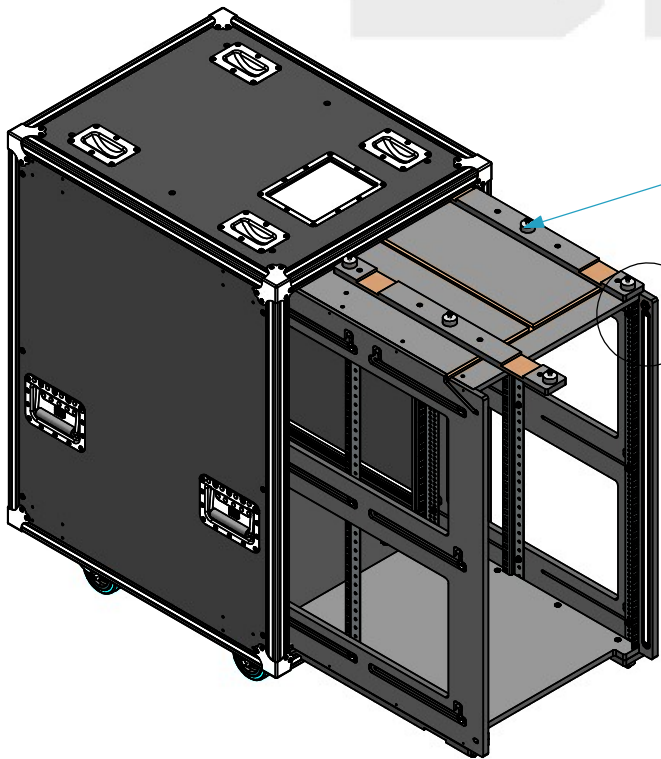


Anti-vibration mounts
between the inner rack
and the flightcase



Touch dimmer
switch for lighting

LED lighting

Total height
with wheels

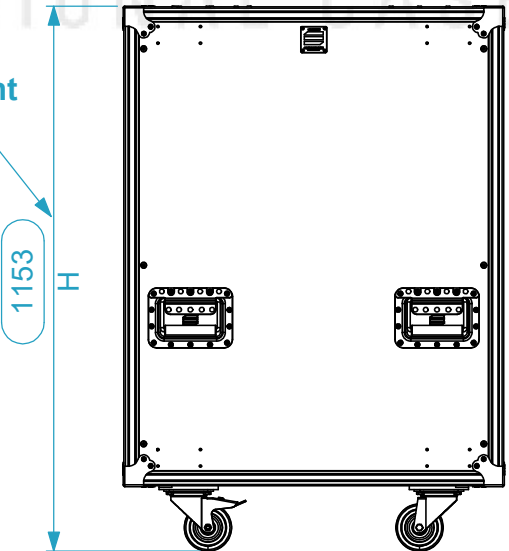

1153
H

640
Max. between rack rails


600 (Max.)
Adjustable

FRONT

Free slots for
additional side rails


20U Front rack rail
(adjustable)

SECTION A-A

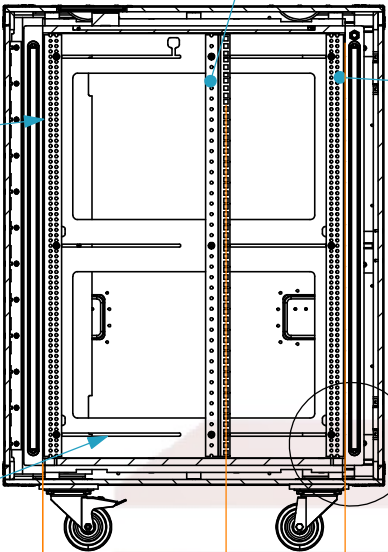

20U
Adjustable side rack rail
(for device back support)

20U
Back rack rail
(adjustable)

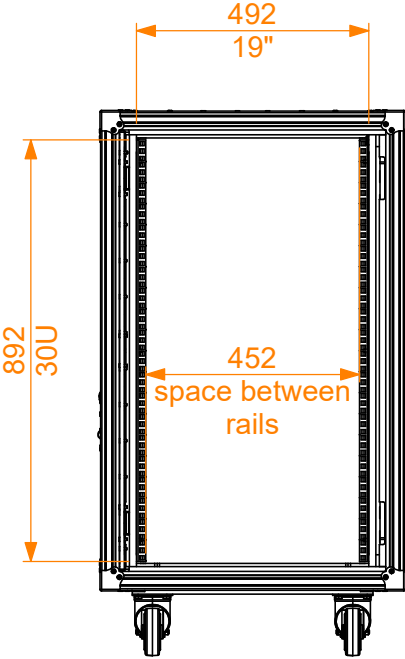

892
30U


452
space between
rails

70
inside

Min. distance between
rack rails and door

1017


A

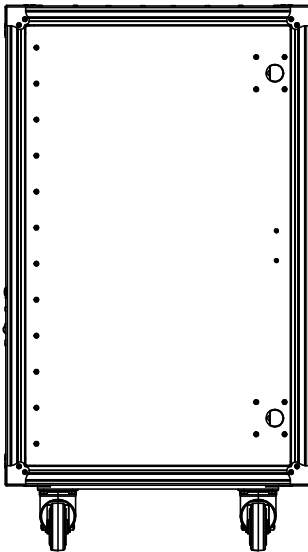

A


640
W

424

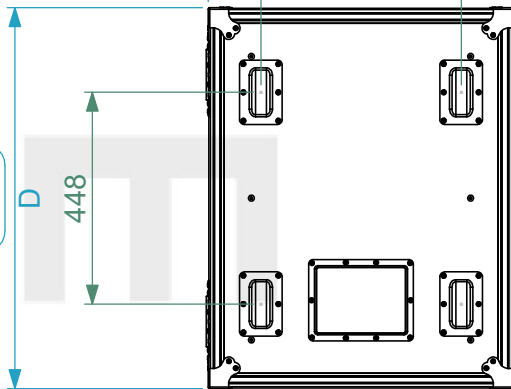

800
D

448

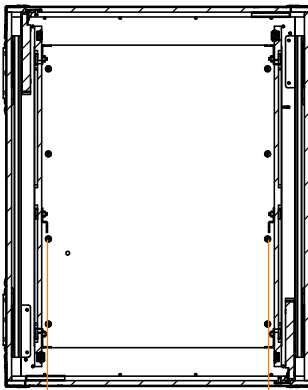

468
between side rails
(for device back support)


L-L

Drawn by	Name	Date
jose.couto	22/06/2026	
Reference	RSS5.3080R	
Scale	units in mm	general tolerance
1:16	DO NOT SCALE	0.8mm
1st Angle projection	Rack Side Sliding. 30U 640-ARR w/ light	




A3

This drawing must not be
copied or disclosed without
consent of the owner




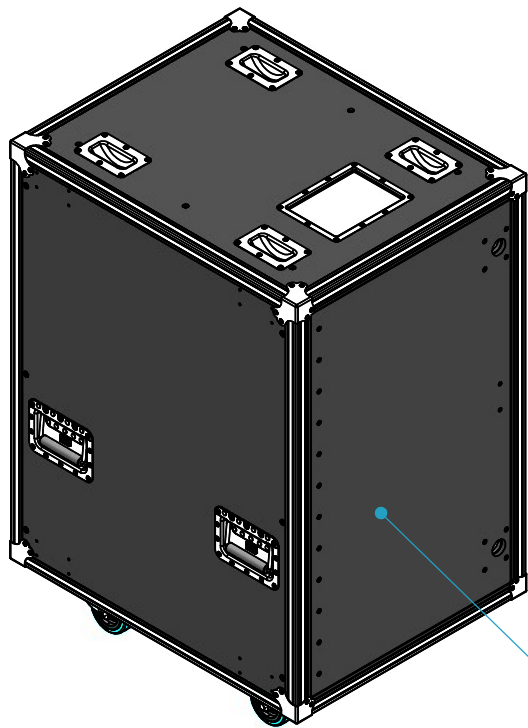


Side Sliding
Door

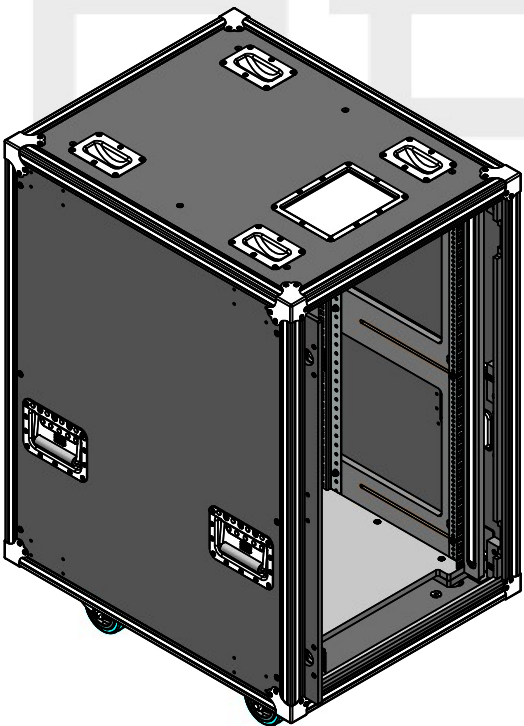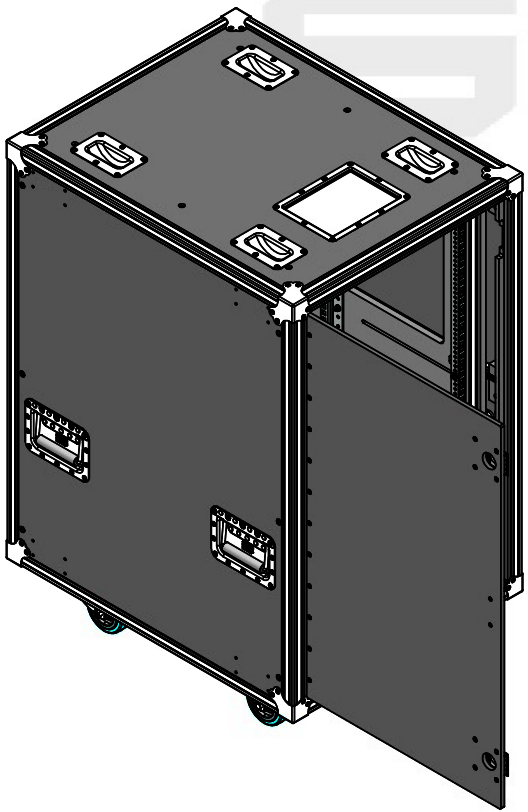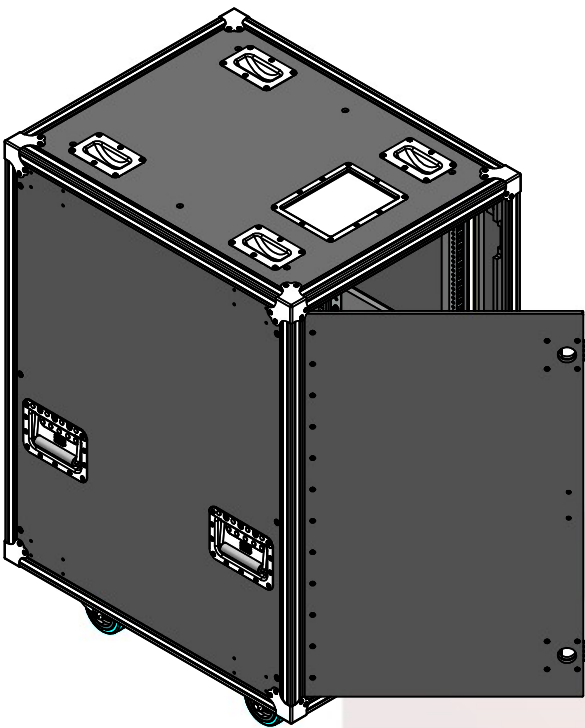

STACKABLE

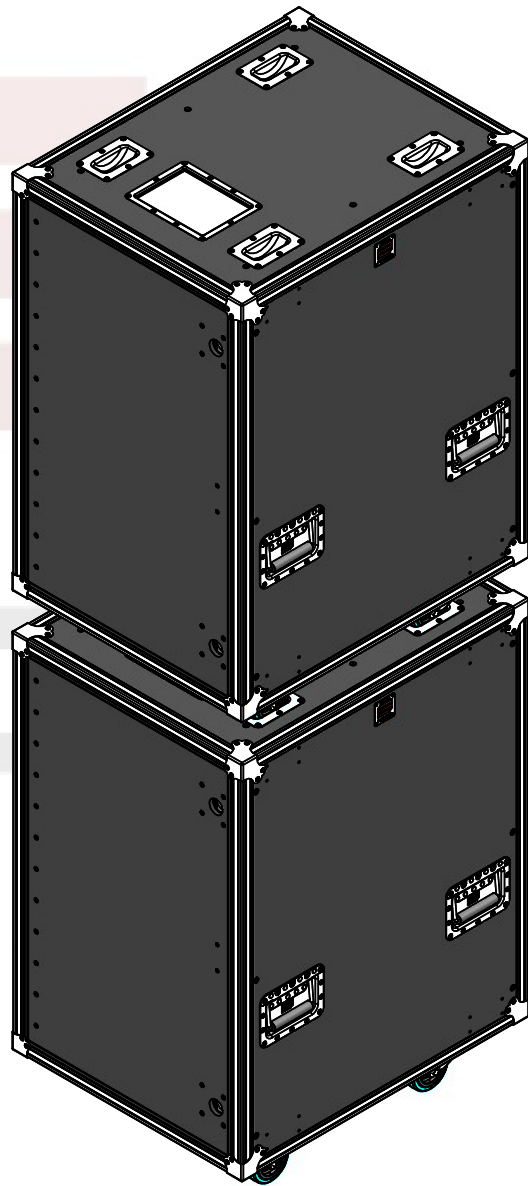

STACKABLE IN RTS
RACKS (800mm Depth)

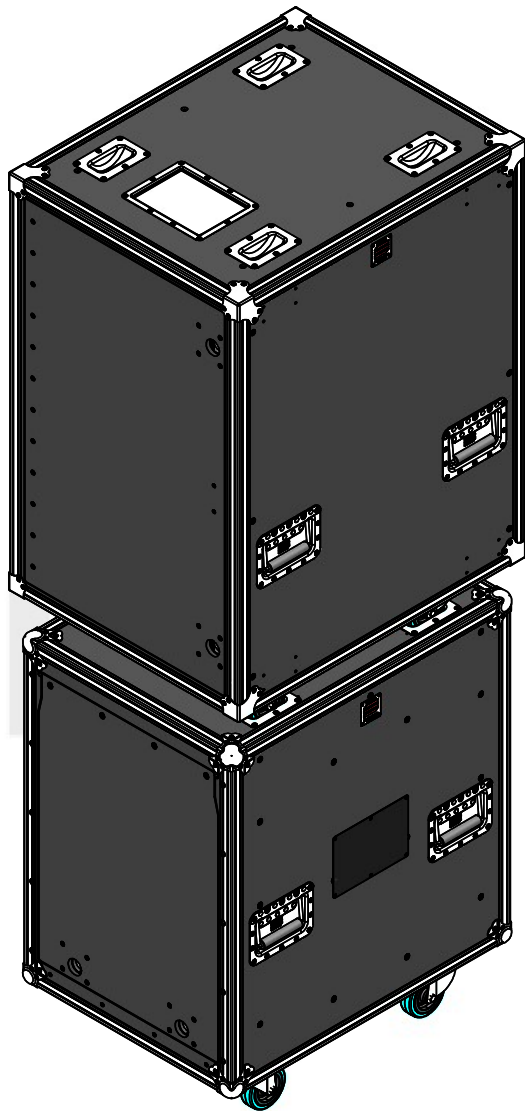

	Name	Date
Drawn by	jose.couto	22/06/2026
Reference	RSS5.3080R	
	units in mm	general tolerance 0.8mm
	DO NOT SCALE	
	Scale 1:15	
	Rack Side Sliding. 30U 640-ARR w/ light	



This drawing must not be copied or disclosed without consent of the owner



A3